

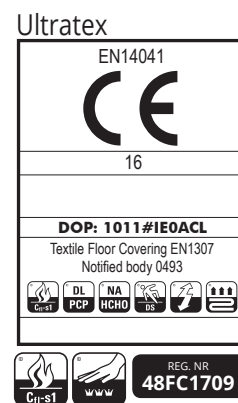


Chordim


CONSTRUCTION	Tufting 5/64" cut pile
STRUCTURE	Tufté 5/64" velours
STRUKTUR	Getuftet 5/64" Velours
STRUCTUUR	Getuft 5/64" velours
PILE MATERIAL	100% PA 6 IMPREL®
COMPOSITION DU VELOURS	
POLMATERIAL	
POOLMATERIAAL	
PRIMARY BACKING	Non woven PES
SUPPORT	Non tissé
TRÄGERMATERIAL	Vlies
TUFTDOEK	Felt
SECONDARY BACKING	Action Back or
DOSSIER	Ultratex
RÜCKEN	
TAPIJTRUG	
PILE WEIGHT	Ca. 630 gr/m²
POIDS DU VELOURS	
POLEINSATZGEWICHT	
POOLGEWICHT	
TOTAL WEIGHT	Ca. 1.650 gr/m² (AB)
POIDS TOTAL	Ca. 1.700 gr/m² (UX)
GESAMTGEWICHT	
TOTAAL GEWICHT	
PILE HEIGHT	Ca. 5 mm
EPAISSEUR DU VELOURS	
POLHÖHE	
POOLHOOGTE	
TOTAL HEIGHT	Ca. 7 mm
EPAISSEUR TOTALE	
GESAMTHÖHE	
TOTALE DIKTE	
TUFT DENSITY	Ca. 378 000/m²
NOMBRES DE POINTS	
NOPPENZAHL	
AANTAL PUNTEN	
PILE DENSITY	Ca. 0.098 g/cm³
DENSITÉ DU VELOURS	
POLROHDICHTHEIT	
POOLDICHTHEID	
CLASSIFICATION	EN 1307
CLASSEMENT	32 - LC2 (AB)
KLASSIFIKATION	32 - LC3 (UX)
CLASSIFICATIE	
UPEC	U3 P3 E1 C0 only on AB
CHAMBORD AB	Certification CSTB: 10/265
CASTOR CHAIR SUITABILITY	EN 985
CHAISE À ROULETTES	A: intensive use
STUHLROLLENEIGNUNG	
ROLSTOELGESCHIKTHEID	
STAIR SUITABILITY	EN 1963
ESCALIERS	A: intensive use
TREPPENEIGNUNG	
TRAPPENGESCHIKTHEID	

PERMANENTLY ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERTUNG GELUIDSISOLATIE	ISO 140-8 ca. 24 dB ΔLw (AB) ca. 29 dB ΔLw (UX)
SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 0.20 Qw (AB) 0.30 Qw (UX)
THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLASSWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0.13 m² K/W (AB) 0.15 m² K/W (UX)
FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 5-6
COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4-5
FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 Action Back: Bfl-s1 if glued UX: Cfl-s1
RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
NUMBER OF COLOURS NOMBRES DE COULEURS ANZAHL FARBEN AANTAL KLEUREN	8
WIDTH LARGEUR BREITE BREEDTE	EN ISO 3018 ca. 400 cm

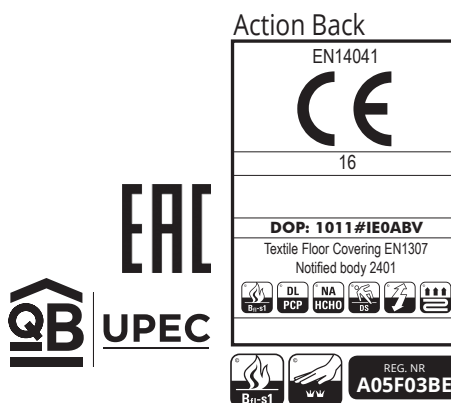





▲ ProCH19700




▲ ProCH19300




▲ ProCH4400

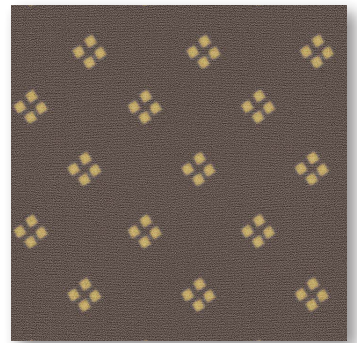


▲ ProCH4 900




▲ ProCH1 000



▲ ProCH1700



▲ ProCH7700

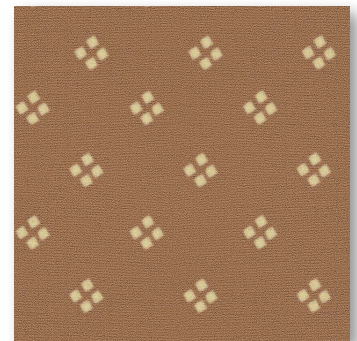

▲ ProCH5500

↔ ca. 8 cm ↑ ca. 8 cm